

WIRELESS REMOTE to BUCHER PUMP


PIERCE

Pierce Arrow Inc. • www.piercearrowinc.com • 1-800-658-6301
549 U.S. HWY 287 S. • Henrietta, Texas 76365

PS002 Wireless Remote transmitter




PS002 Wireless Remote receiver

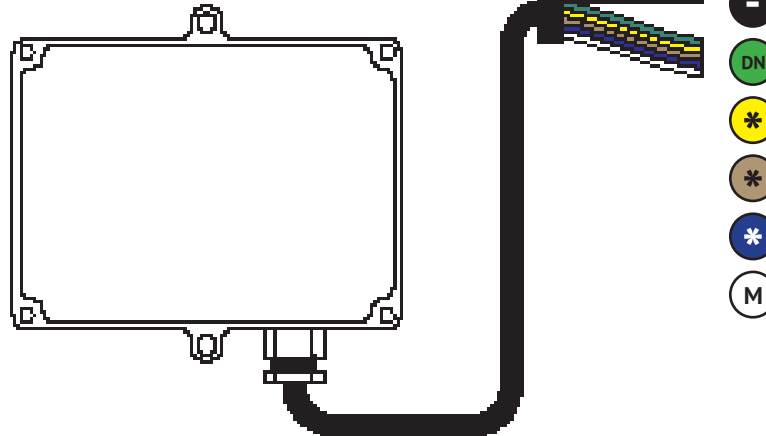

- +
-
- DN
- *
- *
- *
- M

PM3554 Bucher Pump

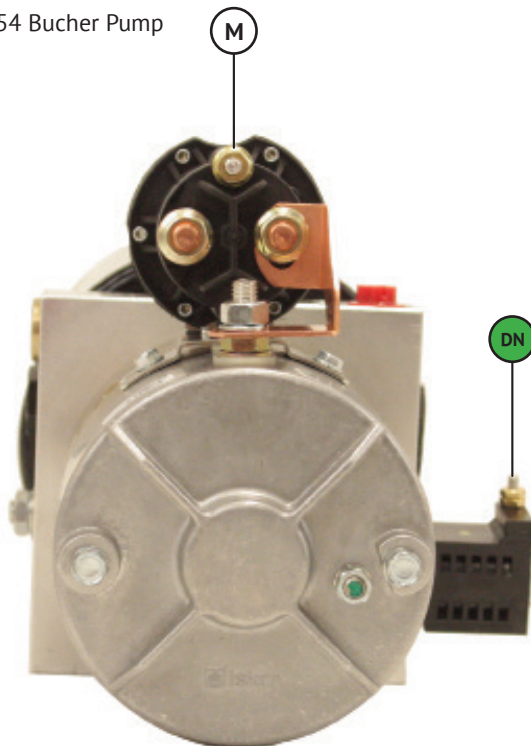

- + Red (12V POWER) needs to be wired directly to the battery with an inline fuse.
 - Black (GROUND) needs to be wired directly to the battery.
- Yellow, brown, and blue will not be used in this application.

CATEGORY	REMOTE
-----------------	--------

PART NO.	PS002 to PM3554
-----------------	-----------------

PRODUCT DESCRIPTION
Two-Function Wireless Remote to Bucher Pump with Dual Action

WIRING DESCRIPTION
This chart depicts wiring from a Pierce PS002 wireless remote to a Pierce PM3554 Bucher Pump.
NOTE: Use #16 or #18 gauge wires for all connections. Use a 5/16-18" x 3/4" bolt for the ground connection. Wiring not included.

WIRING CHART

Connect the wires to the corresponding signs.

- | | |
|--|---|
| + 12V to battery (red) | * NOT USED (yellow) |
| - GROUND to battery (black) | * NOT USED (brown) |
| M MASTER (white) | * NOT USED (blue) |
| DN DOWN (green) | |