



Thank you for choosing Pierce!

We strive to offer 100% customer satisfaction on all our products and customer service.

Are you 100% satisfied?

IF YES: Please write a review on our Facebook page:
www.facebook.com/piercearrowinc

IF NO: Call us at 800-658-6301 or let us know how we can help at:
www.piercearrowinc.com/contact-us

Learn how to use the Badger!



*For predator calling tips go to
www.piercearrowinc.com/thebadger.*

Sign up for product updates!

REGISTER YOUR BADGER TO RECEIVE PRODUCT UPDATES.

Log on to www.piercearrowinc.com/warranty to be the first to know about PIERCE product updates.



THE BADGER - PREDATOR + CATTLE SIREN

PRODUCT MANUAL

549 U.S. HWY 287 S.
HENRIETTA, TEXAS 76365

TOLL FREE | 800-658-6301
DIRECT | 940-538-5643
FAX | 940-538-4382

DESIGNED IN HENRIETTA, TEXAS
MADE IN CHINA

For more information:
www.PierceArrowInc.com

UPDATED: 06.27.2017

SAFETY WARNINGS

- Make sure the Badger is wired with a 15 Amp in line fuse to protect your vehicle and wiring. (NOT INCLUDED)
- Do not stand in front of speaker when in use.
- Do not use the siren while on a state road or highway.
- Do not mount the Badger anywhere that will obstruct your view out of the vehicle.
- Avoid mounting the siren where it will contact brush or low hanging branches.
- Do not to use near people or children. Wear proper hearing protection during use.

SPECIFICATIONS

The Badger - Predator + Cattle Siren
BADGER1

SIREN SPECIFICATIONS

- Duty Cycle – continuous
- Decibel Level – 130 – 150 dB
- Product Dimensions – 5.2" X 8.2" X 5.7"
- Product Weight – 5.95 lbs.
- Total Weight (box + product) – 6.6 lbs.
- Voltage - 12 V
- Ampere – 100W / .4 amp
- Warranty – 2 years
- Material Type – metal
- Approval – Meets SAE J1849
- Operating Temperature - (-10F – 110F)

CONTROL BOX SPECIFICATIONS

- Product Dimensions – 4 7/8" x 6 1/8" x 3 1/2"
- Voltage – 12 V
- Operating Temperature - (-10F – 110F)

INSTALLATION DIRECTIONS

STEP 1: Mounting the control box

Using two #10-24 machine screws or two #10 self tapping screws mount the Badger control box in the cab of the vehicle. Possible locations include the top of the dash, the front of dash, floor or center console.


STEP 2: Mounting the siren

Using two 1/4" bolts mount the Badger siren to a flat surface outside the vehicle. Possible locations include under the hood, on a cake feeder or on the headache rack.

STEP 3: Wiring

The Badger control box wire has four wires total:

- A. BLACK – Wire the black wire from the control box to the Siren (A)
- B. WHITE – Wire the white wire from the control box to the Siren (B)
- C. RED – Wire the positive form the control box to the Battery (+)
- D. BLACK – Wire the negative from the control box to the Battery (-)

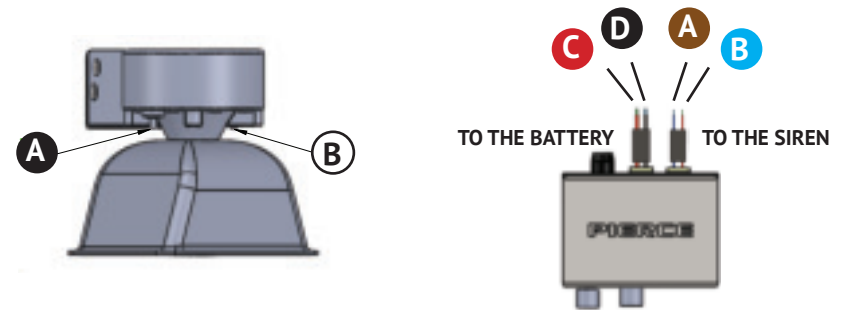

NOTE: A 15-amp in-line fuse (not included) is recommended to add to the RED wire that connects to the battery's positive 12V terminal. This fuse is recommended to protect the vehicle.

USING THE BADGER



HOW TO USE THE BADGER

- Select the SETTING:
 1. Cattle Locator
 2. Distressed Rabbit 1
 3. Distressed Rabbit 2
 4. Jack Rabbit
 5. Wood Pecker
 6. Distressed Fawn

- Select the VOLUME level
- Press POWER
- Press RUN

HOW TO PLAY MUSIC

- Plug in a standard auxiliary cord (not included) into the INPUT jack
- To turn on or off, press the POWER button
- Choose your volume