

WIRELESS REMOTE to BUCHER PUMP


PIERCE

Pierce Arrow Inc. • www.piercearrowinc.com • 1-800-658-6301
549 U.S. HWY 287 S. • Henrietta, Texas 76365


PS002 Wireless Remote transmitter



PS002 Wireless Remote receiver

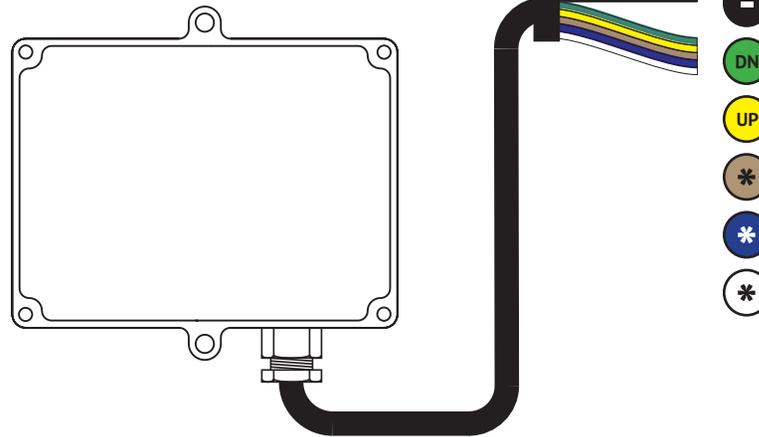

PM319 Bucher Pump

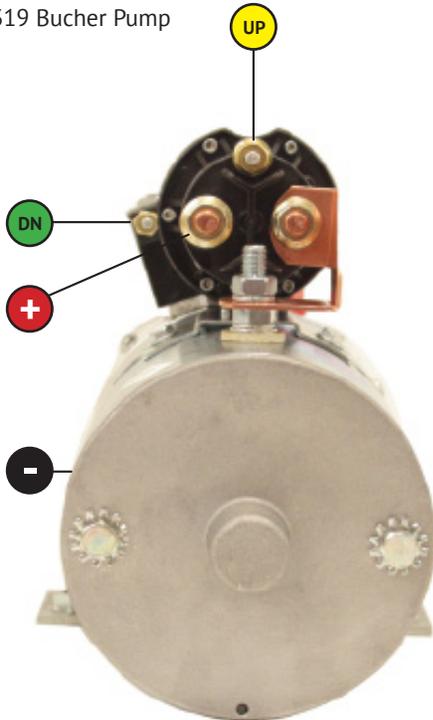

- Red (12V POWER) needs to be wired directly to the battery.
- Black (GROUND) needs to be wired directly to the battery.

Brown, blue, and white will not be used in this application.

CATEGORY	REMOTE
-----------------	--------

PART NO.	PS002 to PM319
-----------------	----------------

PRODUCT DESCRIPTION
Two-Function Wireless Remote to Bucher Pump

WIRING DESCRIPTION
This chart depicts wiring from a Pierce PS002 wireless remote to a Pierce PM319 Bucher Pump. NOTE: Place breaker as close to battery as install allows. Use #4 gauge cable for all connections. Use a 5/16-18" x 3/4" bolt for the ground connection. Wiring not included.

WIRING CHART	
Connect the wires to the corresponding signs.	
12 V (red)	NOT USED (brown)
GROUND (black)	NOT USED (blue)
DOWN (green)	NOT USED (white)
UP (yellow)	